

APPC-10XPC

(R23-7241)

Android Panel PC



Product Overview

The APPC-10XPC (R23-7241) is a 10.1-inch Android Panel PC, featuring Android 12 and a new quad-core Cortex-A55 CPU and Mali-G52 GPU (RK3568). It ensures superior performance and next-level user experience. Enjoy hassle-free installation with the VESA mounting frame, and Power over Ethernet+ capability for efficient power provisioning. In addition, the non-glare touch panel, which supports 10-point PCAP touch functionality and high brightness, ensures an optimal user experience. The APPC-10XPC (R23-7241) is a highly versatile device, capable of handling any solution with ease. Its variety of I/O ports and pogo pin ports allow you to add any peripheral to further enhance your solution. In addition, the APPC-10XPC (R23-7241) features a 5MP internal camera for extra functionalities.



Powered by Android 12, the APPC-10XPC offers access to the full range of advantages that the Android platform provides, including robust security features and great flexibility.



Revolutionise your user experience with the APPC-10XPC, fuelled by a new powerful quad-core Cortex-A55 CPU and Mali-G52 GPU, this Android Panel PC delivers high performance and advanced graphical capabilities.



Enjoy a simplified installation process. The APPC-10XPC is easy to install with its VESA mounting frame and Power over Ethernet+. You will be up and running in no-time.



The APPC-10XPC features an internal 5MP camera, making it the perfect device for solutions where a camera is required.




The APPC-10XPC comes with a new non-glare coating, contributing to a more comfortable viewing experience by reducing reflections, enhancing visibility and diminishing eye strain.

APPC-10XPC (R23-7241)

Article code: 5010602


Technical Drawing

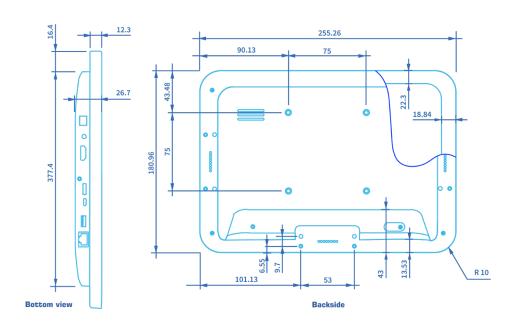

Sustainability


At ProDVX we are committed to doing our part when it comes to the environment. Our products are designed to have the lowest possible impact on the environment, from inception to product retirement. We also strive to operate our offices and warehouse in a carbon-neutral manner. Our aim is to lead the way in conducting responsible business in the digital signage hardware industry.

I/O Overview

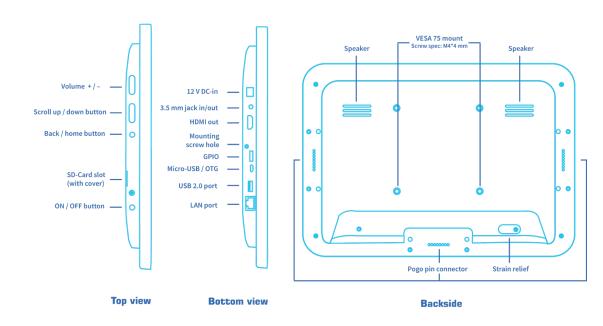

Optional Accessories

GM-75_(8080850) VESA 75 compatible glass mount FM-10_(8080950) Flush mount for in-wall mounting DS-10_(8010100) VESA 75/100 compatible desk stand DS-30_(8010300) VESA 75/100 compatible desk stand DS-75_(8075000) VESA 75 compatible desk stand

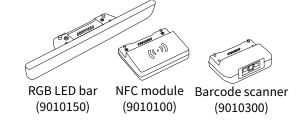

^{*} Compatible with all ProDVX VESA 75 stands, mounts & brackets.

APPC-10XPC (R23-7241)

Article code: 5010602

Product Specifications

Performance

CPU model RockChip RK3568
CPU type Quad-core Cortex-A55
CPU speed A55 - up to 2.0GHz

GPU type Mali-G52
GPU speed up to 950MHz

RAM 4GB
RAM type LPDDR4
Storage 16GB
Storage type eMMC

External storage SD-Card Slot (door)

S Android 12

Panel

LCD | 1280x800xRGB@60Hz

 Type
 TFT LCD IPS

 Size
 10.1

 Contrast
 800 to 1

 Viewing Angle
 H160 / V160

Colours 8 bit LVDS (16.7M) 72%NTSC CIE1931

Response time 30 ms

Backlight Edge-LED backlight

 BLU
 500 cd/m2

 Cover glass
 >6H - 1.55mm

 Treatment
 Glare

Treatment Glare Haze 2~8%

Touch type 10 TP Pcap 10ms

Frame

Size | 255,3 x 181 x 26,7 mm

Weight 650 g

Material ABS+PC (Macrolon)

VESA VESA 75 Color Black

Certification:

UKCA,CE,FCC,RoHS,REACH

Special

PoE | IEEE 802.3at (PoE+)

IEEE 802.1x LAN & WiFi, PEAP/TLS/TTLS

Cooling Fanless HDMI-in N.A.

HDMI-outYes, HDMI outWiFi802.11 a/b/g/n/ac

Bluetooth

LAN 10/100/1000 Mbps LAN

Audio internal 2 x 2 W

Audio external 3.5mm jack in/out

Microphone YES

1x USB 2.0 type A

OTG 1x USB 2.0 type micro

Other ports GPIO

PoGo slots
NFC
Via PoGo & USB
Camera
Barcode scan
LED

3x (bottom/left/right)
via PoGo & USB
5 M/P front camera
via PoGo & USB
via PoGo

LED via PoGo Operating hrs 24h / 7d

MTBF 50,000 hours demonstrated

Clock batt. CR1220 Lithium metal, non rechargeable

Alternative OS Debian 11

Power input12 V / 2 A (EU, UK, US)Operating temp $0 \sim 40 \text{ degrees C}$ Storage temp $-10 \sim 55 \text{ degrees C}$

Humidity 10 ~ 90 % non-condensing

Warranty 3 years

Orientation Landscape, Portrait, Table Mode, Flushmount

SIM card slot N.A.

Power usage 10 ~ 23 Watt

OSD language Multi OSD language

Multimedia support

Image formatJPG,JPEG,PNG,BMP,GIFAudio formatAAC,ASF,MP2,OGG,WAV,WMAVideo formatH.264,MP4,MPG,MPEG2,MPEG4