

IPPC-10SLB

(R24-6702)

Intel Panel PC



Product Overview

The IPPC-10SLB (R24-6702) is our latest 10-inch Intel Panel PC. Powered by the Intel N50 processor and with 8GB of memory, it is designed for superior performance. Running Windows 10 IoT, the IPPC-10SLB (R24-6702) integrates seamlessly into your existing IT ecosystem. Installation of the IPPC-10SLB (R24-6702) is made easy thanks to its low power consumption and PoE+ capability, removing the need for complex cabling plans by providing both power and data over one cable. Additionally, the VESA mounting frame ensures the device is compliant with most stands and mounts. The IPPC-10SLB (R24-6702) comes with our iconic full RGB surround LED bar to signal status updates or room availability. The touch panel supports 10-point touch functionality, reaches a brightness up to 500 cd/m2 and receives a non-glare treatment. This makes it our most powerful Intel Panel PC to date, and will provide the best user experience there is.



Elevate your interactive experience with the IPPC-10SLB. Equipped with an Intel N50 processor and 8GB of memory, the IPPC-10SLB features a high-performance processor ready for any application.



Powered by Windows 10 IoT, the IPPC-10SLB provides a secure and highly intuitive operating system that integrates seamlessly into your existing IT ecosystem.



Enjoy a simplified installation process with the IPPC-10SLB. This Intel Panel PC is easily installable due to its PoE+ capability and VESA mounting frame.



From room signage to point-of-sale solutions, easily employ efficient signaling via our iconic full RGB surround LED bar.




The IPPC-10SLB comes with a new non-glare coating, contributing to a more comfortable viewing experience by reducing reflections, enhancing visibility and diminishing eye strain.

IPPC-10SLB (R24-6702)

Article code: 6010370


Technical Drawing

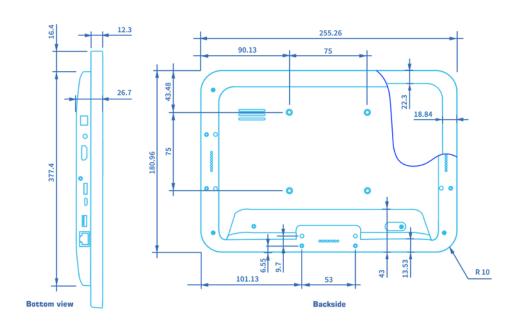

Sustainability


At ProDVX we are committed to doing our part when it comes to the environment. Our products are designed to have the lowest possible impact on the environment, from inception to product retirement. We also strive to operate our o ices and warehouse in a carbon-neutral manner. Our aim is to lead the way in conducting responsible business in the digital signage hardware industry.

I/O Overview

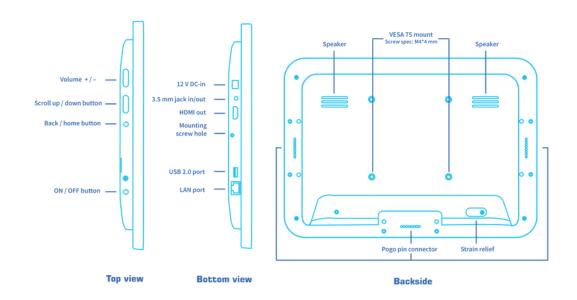

Optional Accessories

GM-75_(8080850) VESA 75 compatible glass mount PS-75_(8086100) VESA 75 compatible triangular stand DS-75_(8075000) VESA 75 compatible desk stand TS-10_(8085100) VESA 75 compatible table stand



^{*} Compatible with all ProDVX VESA 75 stands, mounts & brackets.

IPPC-10SLB (R24-6702)

Article code: 6010370

Product Specifications

Performance

Intel Pentium Processor N Series **CPU** model

Dual-core N50 **CPU** type up to 3.4GHz **CPU** speed Intel UHD Graphics **GPU** type up to 750MHz **GPU** speed 8GB **RAM**

SO-DIMM DDR4 **RAM type** 128GB

Storage SSD_{M2} Storage type via USB **External storage**

Windows 10 IoT LTSC OS

Panel

1280x800xRGB@60Hz **LCD** TFT LCD IPS **Type** 10.1 Size 800 to 1 Contrast H160 / V160 **Viewing Angle**

8 bit LVDS (16.7M) 72%NTSC CIE1931 **Colours**

Response time

Edge-LED backlight **Backlight**

500 cd/m2 >6H - 1.55mm **Cover glass** Non-glare **Treatment** 2~8% Haze

10 TP Pcap 10ms **Touch type**

Frame

255,3 x 181 x 26,7 mm Size Weight

ABS+PC (Macrolon) **Material**

VESA 75 **VESA** Color Black

Certification:

UKCA, CE, FCC, RoHS, REACH

Special

IEEE 802.3at (PoE+) **PoE IEEE 802.1x** LAN & WiFi, PEAP/TLS/TTLS

Fanless Cooling HDMI-in N.A.

HDMI-out Yes, HDMI out WiFi optional (M.2) optional (M.2) Bluetooth

10/100/1000 Mbps LAN LAN

2 x 2 W **Audio internal**

3.5mm jack in/out **Audio external**

Microphone

USB ports 1x USB 2.0 type A **OTG**

N.A. Other ports N.A.

3x (bottom/left/right) **PoGo slots** via PoGo & USB NFC via PoGo & USB Camera via PoGo & USB **Barcode scan**

Surround LED Bar (full RGB) **LED**

Operating hrs 24h / 7d

Warrantv

Orientation

SIM card slot

Power usage

OSD language

45,000 hours demonstrated **MTBF**

CR2032 Lithium metal, non rechargeable Clock batt. **Alternative OS** Ubuntu 22.04

12 V / 2 A (EU, UK, US) **Power input** 0 ~ 40 degrees C **Operating temp** -10~55 degrees C Storage temp **Humidity**

10 ~ 90 % non-condensing

3 years

Landscape, Portrait

N.A.

10 ~ 20 Watt Multi OSD language

Multimedia support

Image format Audio format

JPG,JPEG,PNG,BMP,GIF AAC,MP3,WMA

Video format AVI, H. 264, MKV